



**Capital Projects & Purchasing Department
113 Mable T. Willis Blvd.
Walterboro, SC 29488
843.539.1968**

BID: CTC-11 GREENWAY TRAIL PROJECT – Phase 2A


BID DUE: Thursday, January 11, 2018 @ 11:00am

**ADDENDUM 1
DATED: JANUARY 8, 2018**

The following questions have been submitted for clarification:


- 1) What type of grass seed is to be used? **Answer:** Seeding Schedule for Permanent Vegetation Lower State as noted on page 869 of the SCDOT Standard Specs 2007.
- 2) Is the silt fence to be wood post or t-post backing? **Answer:** Both post types are acceptable.
- 3) Is the area to be grassed for entire area cleared as in back of rail bed to clearing limits on 303 or 303 side of rail bed to woods? **Answer:** All disturbed areas must be grassed.
- 4) Given the scope of the work and that we would self perform the project as a non-DBE/WBE contractor is this a bid we could still participate in? **Answer:** Yes. The DBE/WBE percentages are “goals” and not a requirement due to project size.
- 5) Is there a project budget for the work? **Answer:** A budget is not available.
- 6) Will there be any gravel or rock material supplied by the contractor for the road bed?
Answer: No.
- 7) Provide notes/descriptions on Scheme C signage? **Answer:** See scheme chart on next page.

SCHEME A

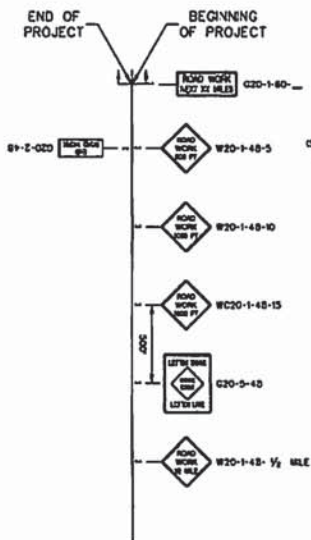


102 SQUARE FEET

SCHEME B

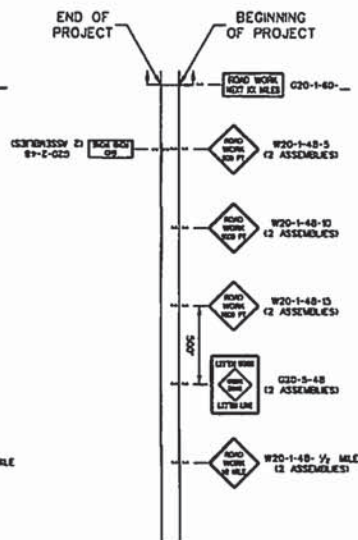


194 SQUARE FEET

SCHEME C

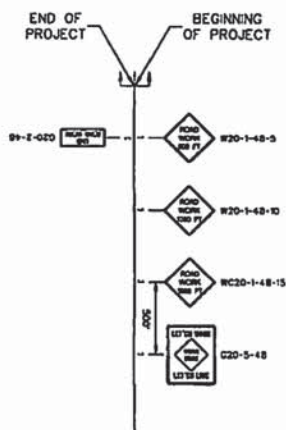


76 SQUARE FEET

SCHEME D

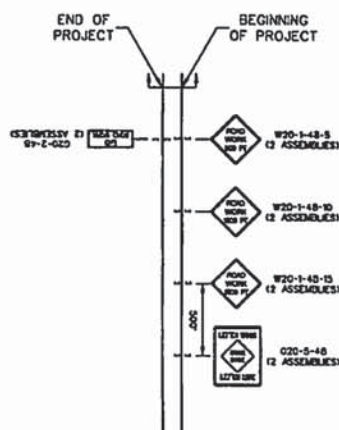

152 SQUARE FEET


SCHEME E



24 SQUARE FEET

REFERENCES

WORK ZONE TRAFFIC CONTROL ENGINEER



Willie E. McConnell
SIGNATURE
8/2/12
DATE

GENERAL NOTES

1. ALL SIGN LOCATIONS ARE TO BE MEASURED FROM THE WORK AREA. THE WORK LIMITS FOR THE PROJECT WILL BE DETERMINED BY THE ENGINEER AND AS INDICATED IN THE CONTRACT.
2. INSTALL ALL PERMANENT CONSTRUCTION SIGNS ON APPROVED GROUND MOUNTED SIGN POSTS UNLESS OTHERWISE DIRECTED BY THE DEPARTMENT. UTILIZE EITHER 3 INCH U-CHANNEL OR SQUARE STEEL TUBE POSTS FOR THESE INSTALLATIONS. INSTALL EACH PERMANENT CONSTRUCTION SIGN ASSEMBLY NO LESS THAN 2 FEET FROM THE NEAR EDGE OF A PAVED SHOULDER OR THE FACE OF A CURB OR 6-12 FEET FROM THE NEAR EDGE OF AN ADJACENT TRAVEL LANE WITHOUT THE PRESENCE OF A PAVED SHOULDER OR A CURB & CUTTED TO THE NEAREST EDGE OF THE SIGN ASSEMBLY. ALSO, MOUNT EACH PERMANENT CONSTRUCTION SIGN ASSEMBLY TO PROVIDE A MOUNTING HEIGHT OF NO LESS THAN 7 FEET OR NO GREATER THAN 8 FEET FROM THE BOTTOM EDGE OF THE PRIMARY SIGN TO THE GRADE ELEVATION OF THE NEAR EDGE OF THE ADJACENT TRAVEL LANE. HOWEVER, IF A SECONDARY SIGN IS MOUNTED BELOW THE PRIMARY SIGN, MOUNT THE SIGN ASSEMBLY TO PROVIDE A MOUNTING HEIGHT OF NO LESS THAN 8 FEET FROM THE BOTTOM EDGE OF THE SECONDARY SIGN TO THE GRADE ELEVATION OF THE NEAR EDGE OF THE ADJACENT TRAVEL LANE. PROVIDE AND UTILIZE SPECIAL SIGN MOUNTING DEVICES AND HARDWARE AS NECESSARY FOR INSTALLING PERMANENT CONSTRUCTION SIGN ASSEMBLIES IN AREAS WHERE CONCRETE MEDIUM BARRIER WALLS, DROVE PARAPET WALLS OR DOUBLEFACED OUMBARNS ARE PRESENT.
3. MOUNT ALL FLAT SHEET PERMANENT CONSTRUCTION SIGNS STRAIGHT AND LEVEL AND WITH THE FACE OF THE SIGNS PERPENDICULAR TO THE SURFACE OF THE ROADWAY.
4. REFLECTORIZE ALL ORANGE PERMANENT CONSTRUCTION SIGNS AND ANY ORANGE AREAS OF MULTICOLORED PERMANENT CONSTRUCTION SIGNS WITH A FLUORESCENT ORANGE COLORED PRISMATIC RETROREFLECTIVE SHEETING. REFLECTORIZE ALL WHITE PERMANENT CONSTRUCTION SIGNS AND ANY WHITE AREAS OF MULTICOLORED PERMANENT CONSTRUCTION SIGNS WITH A WHITE COLORED PRISMATIC RETROREFLECTIVE SHEETING.
5. SPACINGS INDICATED ARE FOR NORMAL CONDITIONS; ADJUSTMENTS MAY BE REQUIRED DUE TO HORIZONTAL AND/OR VERTICAL ALIGNMENTS OR OTHER SIGN DISTANCE RESTRICTIONS.
6. ALL TRAFFIC CONTROL DEVICES SHALL COMPLY WITH ALL NCOSP REPORT 350 REQUIREMENTS AND SHALL REQUIRE APPROVAL BY THE DEPARTMENT. ONLY THOSE TRAFFIC CONTROL DEVICES INCLUDED ON THE "APPROVED PRODUCTS LIST FOR TRAFFIC CONTROL DEVICES IN WORK ZONES" ARE CONSIDERED ACCEPTABLE FOR USE. THIS LIST MAY BE ACCESSSED ON THE DEPARTMENT'S WEB SITE AT: www.scdot.gov.
7. THE DEPARTMENT RESERVES THE RIGHT TO RESTRICT WORK OPERATIONS AND/OR WITHHOLD THE MONTHLY ESTIMATE IF THE TRAFFIC CONTROL IS NOT PROPERLY INSTALLED AND MAINTAINED AS DIRECTED BY THE STANDARD SPECIFICATIONS, THE SPECIAL PROVISIONS, THE STANDARD DRAWINGS, THE PLANS AND/OR THE ENGINEER.

THIS DRAWING IS NOT TO SCALE

6			
5			
4			
3			
2			
1	1-8-12	JCS	GENERAL UPDATE
0	8-13-07	JCS	DRAWING NO. UPDATE
8	DATE	CHK	DESCRIPTION

SCDOT
SOUTH CAROLINA DEPARTMENT OF TRANSPORTATION
DESIGN STANDARDS OFFICE
955 PARK STREET
ROOM 405
COLUMBIA, SC 29201

STANDARD DRAWING

CONSTRUCTION
SIGNING
PERMANENT
PRIMARY ROUTES

605-010-02
EFFECTIVE LETTER NUMBER 2415